

12 Channels RF SAW Transmitters with KEELOQ[®] HCS 301

TX 12 CH
(650200487)

1mW E.R.P.
3K3 bit/s

3 Lithium Long Life
2X 3V battery

Information subject to change without notice


Description

Multichannel hand-held RF transmitters with rolling code encoder HCS301. Ideal for remote control applications requiring high security level and high channels number. KEELOQ[®] HCS301 Microchip Code Hopping Encoder "in circuit" re-programmable.

Descrizione

Trasmettitore RF palmare multicanale dotato di encoder a codice dinamico HCS301. Ideali per applicazioni dove sia richiesto un elevato grado di sicurezza ed un elevato numero di canali. KEELOQ[®] Code Hopping Encoder HCS301 Microchip, riprogrammabile "in circuit".

Mechanical Dimensions

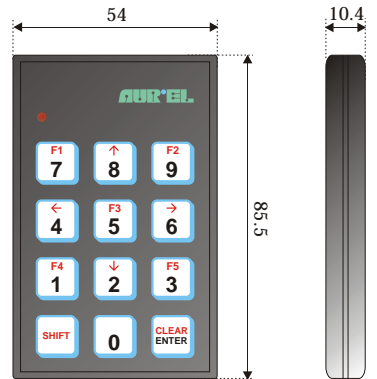

Ta = 25 °C

Technical Specification

CHARACTERISTICS	MIN	TYP	MAX	UNIT
V _s Supply Voltage • Alimentazione		6		Vdc
I _s Supply Current • Corrente assorbita		10		mA
F _c RF carrier frequency • Frequenza portante RF		433.92		MHz
P _o Effective radiated power • Potenza irradiata			1	mW
B _{DS} Programmable baud rate • Baud rate programmabile			3300	bit/s
I _c Programmable I.D. code • Codice identificativo program.		28		bit
D _c Dynamic code • Codice dinamico		32		bit
T _{OP} Operating temperature range • Temperatura di lavoro	-20		+80	°C

Certification Tests from PRIMA RICERCA & SVILUPPO - 22020 Gaggino Faloppio (CO) Italy.
I report tecnici sono stati ottenuti dal laboratorio PRIMA RICERCA & SVILUPPO - 22020 Gaggino Faloppio (CO) Italia.

Technical Mail : Lab-el@aurel.it