


REVISION RECORD			
REV	ECN	DESCRIPTION	DFT DATE

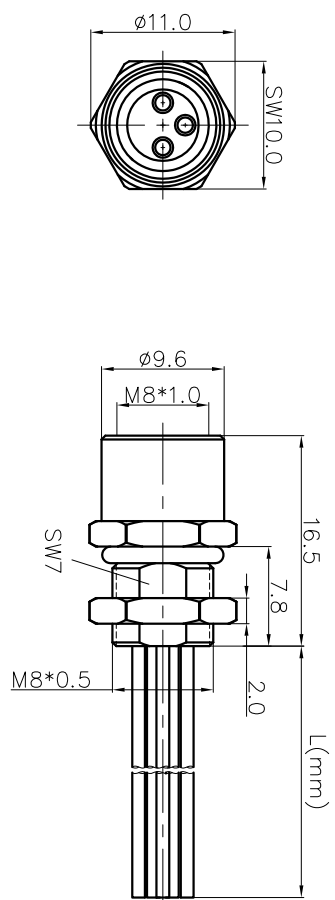

SD-M8X-XXP-FF-SH7BXX-00A(H)

Coding: A,B

Pin number: 03,04,
05,06,08

XX: 150~1500mm
15: 150±15mm
30: 300±20mm
50: 500±20mm
A0: 1000±40mm
A5: 1500±40mm
Wire Length(L): 150~1500mm

- NOTES:
- Rated voltage/current : 3pin:60V / 3A
4pin:60V / 3A
5pin:30V / 3A
6pin:30V / 1.5A
8pin:30V / 1.5A
 - Withstanding voltage : 3,4pin: AC850V/1Min
5,6,8pin: AC650V/1Min
 - Levels of protection: IP67
 - Wire specifications :
3pin: 24AWG/0.25mm², UL1061
4pin: 24AWG/0.25mm², UL1061
5pin: 24AWG/0.25mm², UL1061
6pin: 26AWG/0.14mm², UL1061
8pin: 26AWG/0.14mm², UL1061

5. Wire connection mode: soldering

6. Operating temperature: -25°C~+80°C

7. For Panel Thickness Range: 2.0~3.0mm

8. RoHS Compliance

9. Tolerance :

.X ±0.25mm

.XX ±0.1mm

Angles ±1°

	3pin A Coding	4pin A Coding	5pin B Coding	6pin A Coding	8pin A Coding
D					
E	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View
F	Wire Color	Wire Color	Wire Color	Wire Color	Wire Color
G	Pin	Pin	Pin	Pin	Pin
H	Pin Out	Pin Out	Pin Out	Pin Out	Pin Out
A	1	2	3	4	5
B	2	3	4	5	6
C	3	4	5	6	7
D	4	5	6	7	8
E	5	6	7	8	
F	6	7	8		
G	7	8			
H	8				

DETACHED LISTS			
PART NO:	SDW8XXXPFSSH7BXX00AH	NAME:	SD-M8X-XXP-FF-SH7BXX-00A(H)
APPD:		TITLE:	CUSTOMER DRAWING
CHKD:		DRAWING NO.:	XXXXXXXX-XX-CXX
DFT:	SQ 2019.05.17	DO NOT SCALE DRAWING	SCALE
THIRD ANGLE PROJECTION		SCALE	1:1

DEGSON 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

REV DO-1

SHEET 1/1