

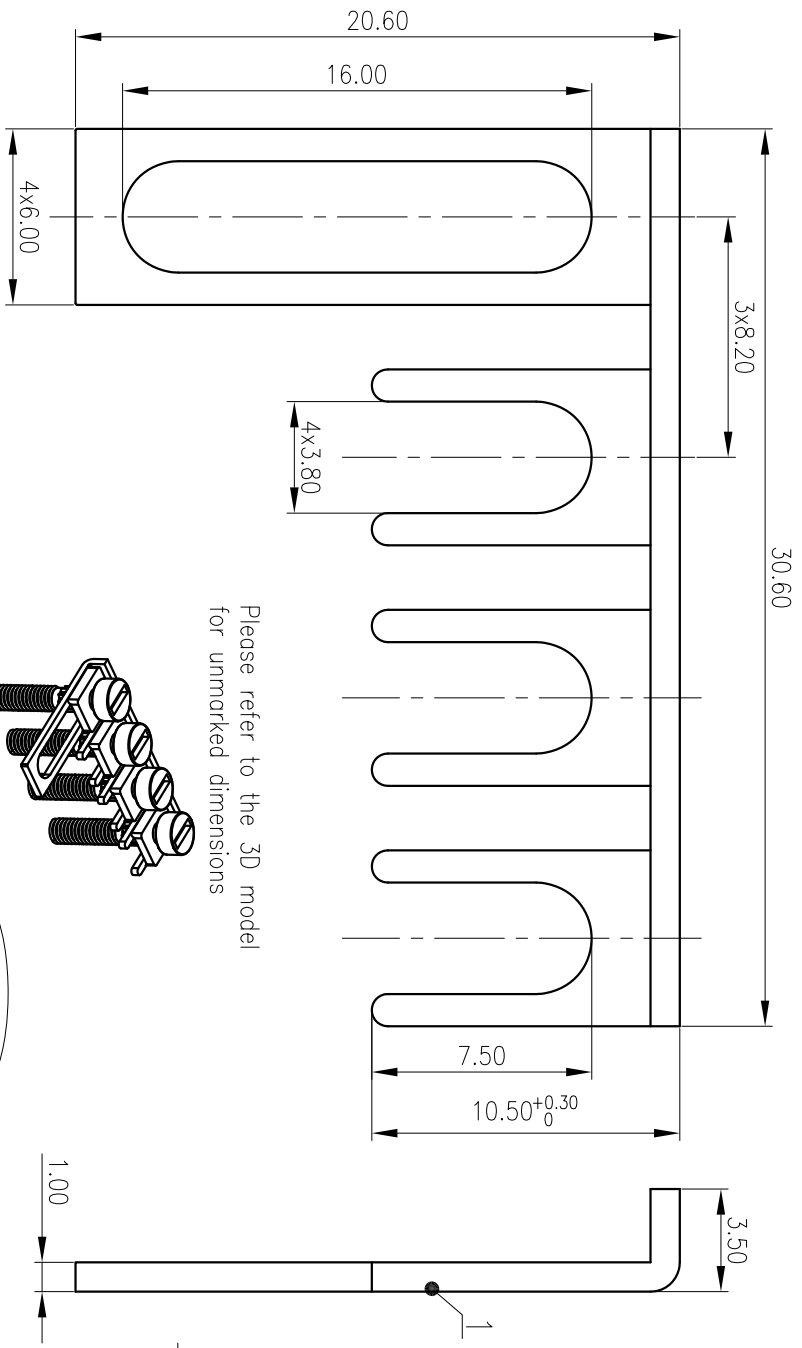


公差表/General Tolerances(mm)		0.1/10
0	>3	~
3	>6	~
6	>10	~
10	>18	~
18	>30	~
30	>50	~
50	>80	~
80	>120	~
120	>180	~
180	>250	~
250	>315	~
315	>400	~
400	>500	~
500	>500	~
$\pm 0.12$	$\pm 0.18$	$\pm 0.26$
$\pm 0.22$	$\pm 0.31$	$\pm 0.37$
$\pm 0.57$	$\pm 0.80$	$\pm 1.05$
$\pm 1.15$	$\pm 1.60$	$\pm 2.20$
$\pm 2.50$		
$\neq$		

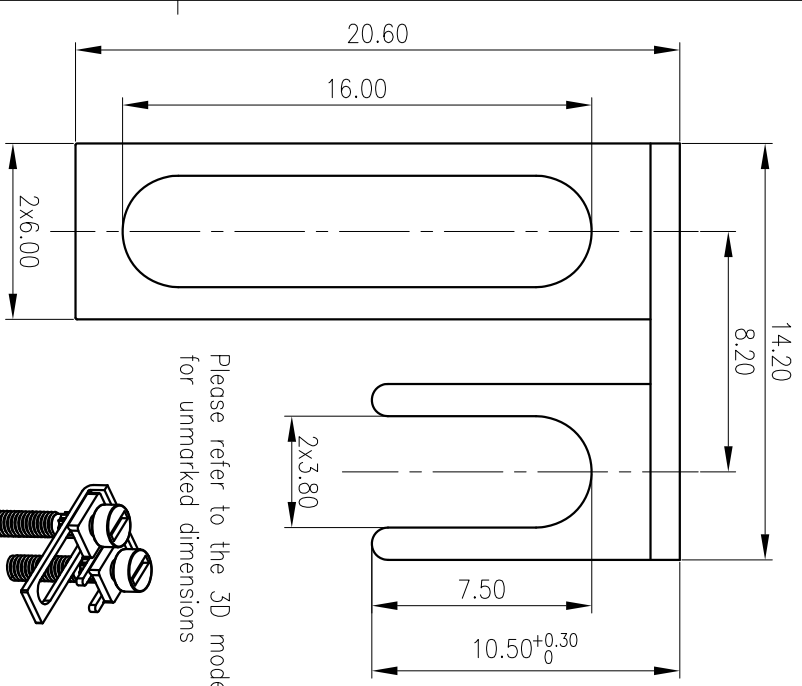

Bulk shipment

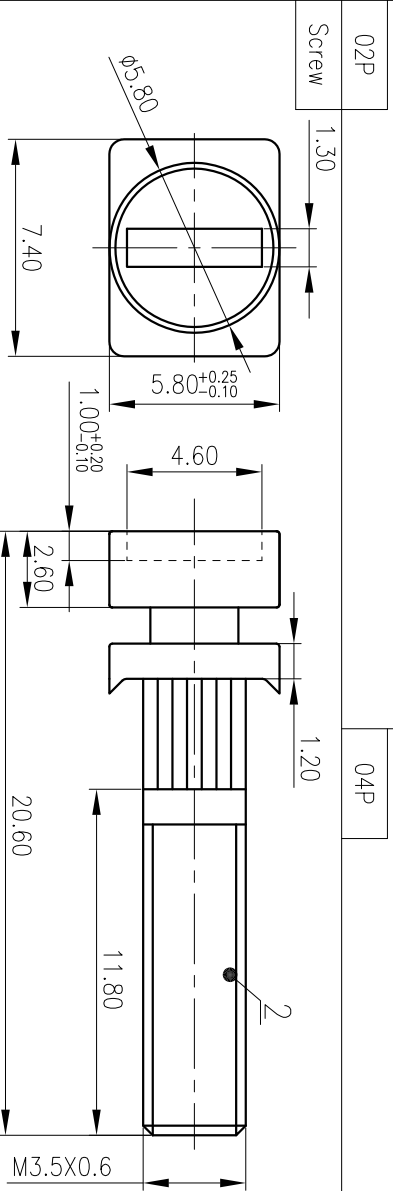

管 发 中 心  
研 发 专 用  
2020.10.20  
(仅限内部使用, 对外无效)

2	Screw	Copper alloy	Ni Plated
1	Bridge	Copper	Sn Plated
ITEM	NAME OF PART	MATERIAL	NOTES
	螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3.5, 0.8/7.02	
	间距/Pitch(mm)	0.8	
	符合RoHS要求/Conform to RoHS	8.20/N=02&04P	Yes

SURFACE: /

MATERIAL: /  
MAT NO.: /  
STATUS: /  
APPD: LIGL 2020.10.20  
CHKD: MGFK 2020.10.20  
DRFT: YanH 2020.10.14  
NAME: **DEGSON** 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

SBXX-RTK/S

DRAWING NO.: 92000030

TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRFT	DATE	SCALE: 4:1	REV	T0